1568 - 1" EDUCTOR

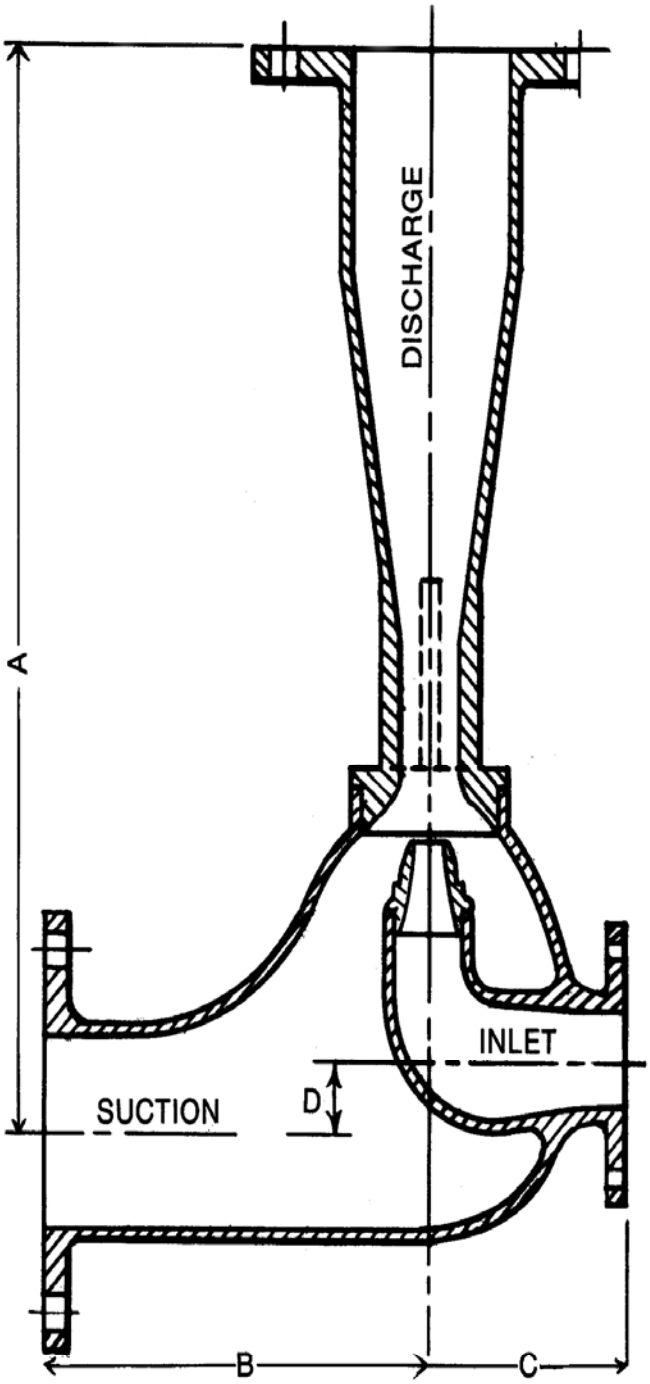

MODEL	Suct. & Disch.	Inlet	A	B	C	D	WT. LBS.
1568-1"	1"	¾"	5½"	3½"	2¼"	½"	6

Materials of Construction

Body & Diffuser	Bronze B 62
Nozzle	Monel or 316 Stainless

GENERAL SPECIFICATIONS

Suction Lift	Up to – 20 Feet
Discharge Head	Up to 80 Feet
Inlet Pressure	50 – 150 PSI
Inlet Quantity	4 – 24 GPM
Suction Capacity	8 – 32 GPM

Flanges

150 LB ANSI B16.24 Flat Face

(also available DIN, JIS, Metric, or undrilled)

The 1568 Flanged Eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that needs to be pumped dry.

SIZE	INLET	SUCTION	DISCHARGE
I.D.	¾"	1"	1"
O.D.	4¼"	4¼"	4¼"
THICK	7/16"	7/16"	7/16"
B.C.	3⅛"	3⅛"	3⅛"
# Holes	4	4	4
HOLE Ø	9/16"	9/16"	9/16"

Dimensions:

Inlet	¾"
Suction	1"
Discharge	1"
'A'	5½"
"B"	3½"
"C"	2¼"
"D"	½"
Weight	6 Lbs

VITA MOTIVATOR CO., INC.
P.O. BOX 8139 ENGLEWOOD, NJ 07631
(201) 567-1151 • FAX (201) 734-8482
michaels.greene@att.net