



# 1568 - 1 1/2" EDUCTOR

## Materials of Construction

Body & Diffuser Bronze ASTM B 62  
Nozzle Monel or 316 Stainless

## GENERAL SPECIFICATIONS

- Suction Lift Up to -20 Feet
- Discharge Head Up to 100 Feet
- Inlet Pressure 50 - 150 PSI
- Inlet Quantity 10 - 40 GPM
- Suction Capacity 12 - 40 GPM


## Flanges

150 LB ANSI B16.24 FLAT FACE (standard)  
(also available DIN or JIS or Undrilled)

	<u>Inlet</u>	<u>Suction</u>	<u>Discharge</u>
<u>I.D.</u>	1"	1 1/2"	1 1/2"
<u>O.D.</u>	4 1/4"	5"	5"
<u>B.C.</u>	3 1/8"	3 7/8"	3 7/8"
<u># Holes</u>	4	4	4
<u>Hole Ø</u>	5/8"	5/8"	5/8"

## DIMENSIONS:

<u>Size</u>	
<u>Inlet</u>	1"
<u>Suction</u>	1 1/2"
<u>Discharge</u>	1 1/2"
<u>"A"</u>	7.75"
<u>"B"</u>	4 1/2"
<u>"C"</u>	2 1/2"
<u>"D"</u>	3/4"
<u>Weight</u>	15 lbs

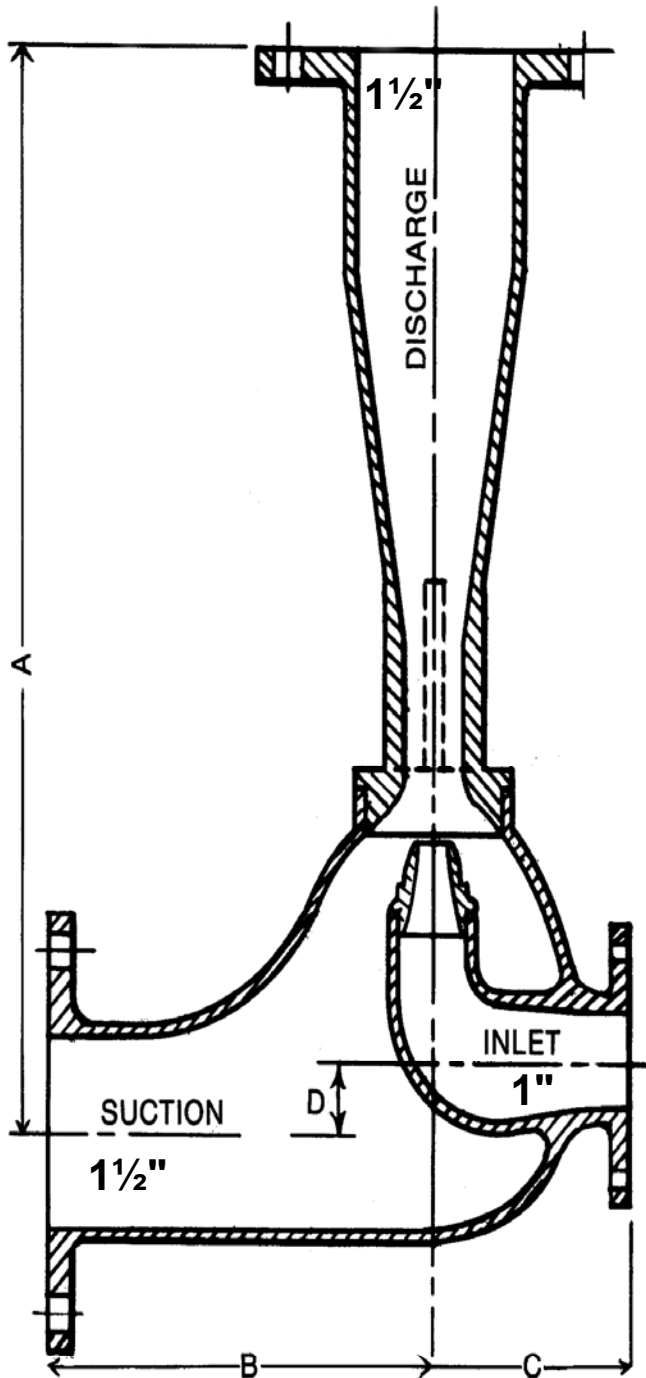

<u>Model</u>	<u>Suct. &amp; Disch.</u>	<u>Inlet</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
1568-1 1/2"	1 1/2"	1"	7.75"	4 1/2"	2 1/2"	.75"

**VITA MOTIVATOR CO., INC.**  
P.O. BOX 8139 ENGLEWOOD, NJ 07631  
(201) 567-1151 • FAX (201) 734-8482  
[michaels.greene@att.net](mailto:michaels.greene@att.net)

