



1568 - 2" EDUCTOR

Materials of Construction

Body & Diffuser Bronze ASTM B 62
Nozzle Monel or 316 Stainless

GENERAL SPECIFICATIONS

- Suction Lift Up to -20 Feet
- Discharge Head Up to 100 Feet
- Inlet Pressure 50- 150 PSI
- Inlet Quantity 40-80 GPM
- Suction Capacity 35-60 GPM

Flanges


Standard Flange 150 LB ANSI B16.24 Flat Face
also available DIN Metric Flanges

Suggested Uses

The V.M. 1568 flanged eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that has to be pumped dry.

Dimensions:

Inlet	1 1/4"
Suction	2"
Discharge	2"
'A'	10"
"B"	6"
"C"	3"
"D"	1"
Weight	21 Lbs

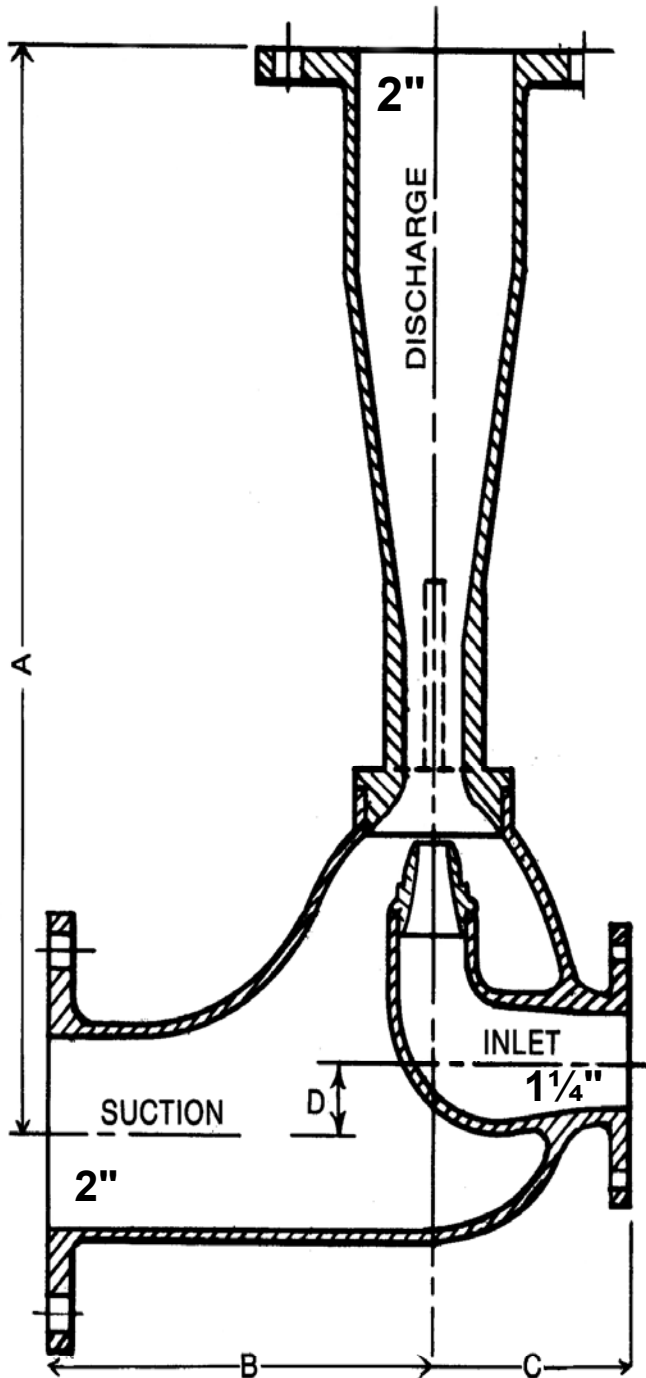

Suct. &						
Model	Disch.	Inlet	A	B	C	D
1568-2"	2"	1 1/4"	10"	6"	3"	1"

VITA MOTIVATOR CO., INC.

P.O. BOX 8139 ENGLEWOOD, NJ 07631

(201) 567-1151 • FAX (201) 734-8482

michaels.greene@att.net

